

2 Megapixel Black Light Zoom 38 modules TH38P+Z


Specially designed for HD IPC, easy to install various housing, integrated switching optical filter, image sensor, encoding and transmission. Free client software support for record, preview, playback and Seetong cloud and mobile monitor. Embedded NVR for high stable requirement system. Open SDK support for industry customer's secondary development. Support various network modes:

IPC ----- NVR ----- Seetong Cloud-----Seetong Client

IPC ----- NVR ----- Seetong Client

IPC ----- Seetong Client

IPC ----- NVR ----- Seetong Cloud-----Seetong APP

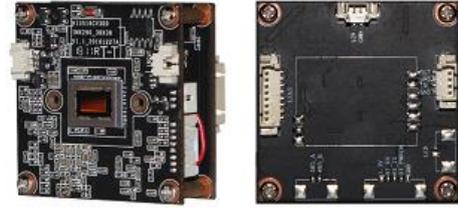

SONY 2MP,2 million zoom, black light, ultra low illumination, low bit rate, low power consumption, Netcom, 3D noise reduction, H.265+

Order	Specification	TH38P+Z 2 million black light zoom 38 module
1	System Structure	Embedded RTOS design, dual-core 32-bit DSP(Hi3516CV300),pure hardware compression,Watchdog,16MB FLASH,1Gb DDR3;
2	Sensor	SONY STARVIS 2MP 1/2.8"(IMX327),0.0001Lux@F1.2(color),0Lux(IR ON);integrate IR-CUT drive, support linkage control between sensor &IR-CUT& photosensitive& LED fill light, support day/night switch,IR-CUT(20mm);
3	Video Process	H.265/H.264 video coding, support dual stream, AVI format; code stream200k~8000k bps adjustable,low bit rate,support PAL and NTSC.
4	Frame Rate	2MP @25 frames, support 7~30 FPS adjustable
5	Image Output	Main stream:1920×1080,1280×960,1280×720; Code stream:704×576,800×448,640×480,640×360,352×288;
6	Audio Interface	1 channel input optional, level 2Vp-p,impedance:1kΩ,support pickup input;1 channel output,impedance:16Ω,30mw output power, support headset and amplifier;
7	Audio Process	G.711 CODE standard, support dual voice talkback and audio and video synchronization
8	Network Interface	1*RJ45 Ethernet interface,10/100M self-adaption,8KV anti-static electric capacity; support RTSP/DHCP/NTP/ONVIF/P2P,GB/T28181 and so on network protocols;
9	LED Passive Interface	1* IR LED control input interface,1*IRCUT interface, support linkage control between IR-CUT and image.
10	Zoom interface	1 zoom autofocus interface to support 4 times zoom (focal length 3.2 ~ 9mm, F1.2-2.2) lens. Matching lens: YT30022FB.IR-JZ-2MP+H62+IR0113 (F1.2) /YT30015FB.IR-JZ-2MP+H14+IR0113 (F1.6)
11	Optional Function	E(POE cable power supply),Smart infrared control,IO.
12	Business Function	configure by WEB, OSD(on screen display),real-time video transmission, motion detection and IO alarm linkage ,center prompt and picture pop-up after IO alarm; support remote surveillance client software(Seetong);support mobile monitoring(iPhone, Android),support "Seetong" cloud service;provide complete SDK pack; off-line alarm push and cloud storage functions optional
13	Others	DC12V power input interface,1.2W power consumption, front end power input, light protection,anti-static,anti-inverse connect, support 18V turn off voltage protection; size :38×38×32mm, net weight 21g,38 size single structure

Remark: 5 megapixel=2592×1944 or 2592×1920, 4 megapixel=2688×1512 or 2560×1440, 3 megapixel=2048×1536 or 2048×1520 or 2304×1296, 2 megapixel=1920×1080 or 1600×1200, 1.3 megapixel=1280×960, 1 megapixel=1280×720;